


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
A		ADDED MISSING Ø1.750 DIMENSION -3, CHANGED NOTE 1, ADDED ASSY DWG.	4/26/2011	RJC	
B		-3 DIMENSION WAS Ø1.50 IS Ø1.501-1.500. -5 DIMENSION WAS Ø1.50 IS Ø1.4996-1.4992.	6/6/2014	DJN	RJC
3	16-0021	UPDATED TO NEW STANDARDS. ADDED REF T/N NOTE. -1 ADDED DIMS Ø.939-.940, .200. ADDED CLEAN UP O.D. AFTER WELDING NOTE. -3 ADDED DIMS Ø1.5, .20. -5 CH'D DIMS WAS Ø.9390-.9400 IS Ø.92, WAS Ø1.4992-1.4996 IS Ø1.497-1.498. CH'D NOTE WAS BORE TO Ø.9400 AFTER WELDING IS BORE TO FINAL DIM AFTER WELDING, SEE -1. -7 CH'D DIM WAS .400 IS (.390). CH'D TOLERANCE ON NON-CRITICAL DIMENSIONS.	2/5/2016	DPD	JAG

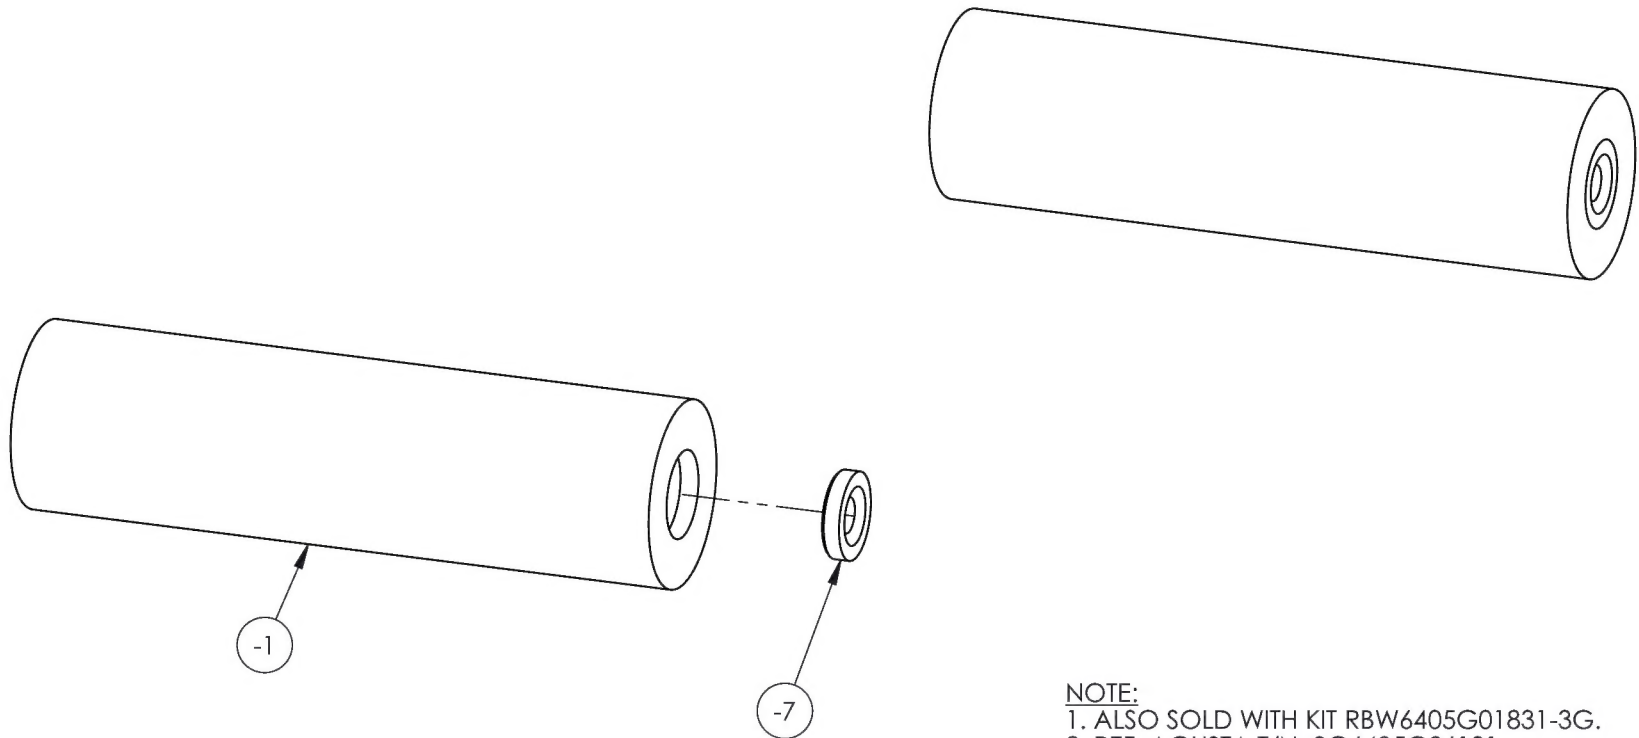



NOTE:
1. ALSO SOLD WITH KIT RBW6405G01831-3G.
2. REF. AGUSTA T/N: 3G6405G06131.

DART AEROSPACE																											
TITLE REACTION ASSY.																											
DWG NO. RBW6405G06131-3G	REV 3																										
<table border="1"> <tr> <td>MAT'L</td> <td>UNLESS OTHERWISE SPECIFIED</td> </tr> <tr> <td>HEAT TREAT</td> <td>DIMENSIONS ARE IN INCHES</td> </tr> <tr> <td>FINISH</td> <td>.XXX ± .005 FRACTIONS ± 1/8</td> </tr> <tr> <td></td> <td>.XX ± .01 ANGLES ± 5°</td> </tr> <tr> <td></td> <td>.X ± .1 SURFACES = 125/✓</td> </tr> <tr> <td>SPEC</td> <td>1. BREAK ALL SHARP EDGES .015 x 45° OR .015R</td> </tr> <tr> <td>DRAWN BY: CLOUGH</td> <td>2. DIMENSIONAL LIMITS APPLY AFTER PLATING</td> </tr> <tr> <td>CHECKED: CLOUGH</td> <td>3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009</td> </tr> <tr> <td>OPPS APPR: ANDERSON</td> <td></td> </tr> <tr> <td>QA APPR: LINDSAY</td> <td>USED ON MODEL</td> </tr> <tr> <td>APPROVED: GILBERT</td> <td>AGUSTA AW139</td> </tr> <tr> <td>SCALE 1:2</td> <td>DATE 3/19/2010</td> </tr> <tr> <td colspan="2">SHEET 1 OF 5</td> </tr> </table>		MAT'L	UNLESS OTHERWISE SPECIFIED	HEAT TREAT	DIMENSIONS ARE IN INCHES	FINISH	.XXX ± .005 FRACTIONS ± 1/8		.XX ± .01 ANGLES ± 5°		.X ± .1 SURFACES = 125/✓	SPEC	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	DRAWN BY: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING	CHECKED: CLOUGH	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	OPPS APPR: ANDERSON		QA APPR: LINDSAY	USED ON MODEL	APPROVED: GILBERT	AGUSTA AW139	SCALE 1:2	DATE 3/19/2010	SHEET 1 OF 5	
MAT'L	UNLESS OTHERWISE SPECIFIED																										
HEAT TREAT	DIMENSIONS ARE IN INCHES																										
FINISH	.XXX ± .005 FRACTIONS ± 1/8																										
	.XX ± .01 ANGLES ± 5°																										
	.X ± .1 SURFACES = 125/✓																										
SPEC	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R																										
DRAWN BY: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING																										
CHECKED: CLOUGH	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009																										
OPPS APPR: ANDERSON																											
QA APPR: LINDSAY	USED ON MODEL																										
APPROVED: GILBERT	AGUSTA AW139																										
SCALE 1:2	DATE 3/19/2010																										
SHEET 1 OF 5																											


ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
	X		-1	1	REACTION ASSY, WELDMENT			2
	1		-3		TUBE	6061		3
	1		-5		CAP	6061		4
			-7	1	WASHER	O-1		5
	ASSY -1							

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
3	16-0021	•1 ADDED DIMS Ø.939-.940, .200. ADDED CLEAN UP O.D. AFTER WELDING NOTE.	2/5/2016	DPD	JAG

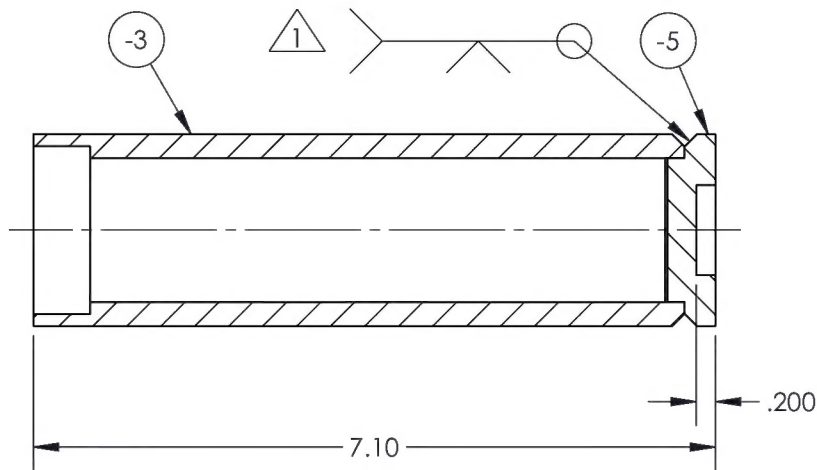

SECTION A-A

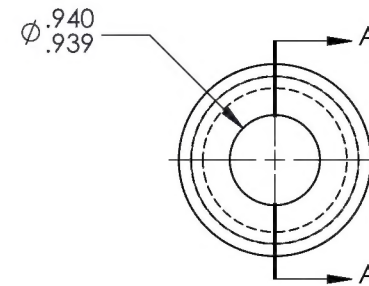

NOTE:

1 CLEAN UP O.D. AFTER WELDING.




TITLE		REACTION ASSY.	
DWG NO.		RBW6405G06131-3G-1	
REV		3	
MAT'L	UNLESS OTHERWISE SPECIFIED		
HEAT TREAT	DIMENSIONS ARE IN INCHES		
FINISH	CLEAR ANODIZE	.XXX ± .010 FRACTIONS ± 1/8	
SPEC	MIL-A-8625, TYPE II, CLASS I	.XX ± .03 ANGLES ± 1°	
DRAWN BY:	CLOUGH	.X ± .1 SURFACES = 125	
CHECKED:	CLOUGH	1. BREAK ALL SHARP EDGES	
OPPS APPR:	ANDERSON	.015 x 45° OR .015R	
QA APPR:	LINDSAY	2. DIMENSIONAL LIMITS APPLY	
APPROVED:	GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
SCALE	1:2	DATE	3/19/2010
		SHEET 2 OF 5	

(-1)


REACTION ASSY. WELDMENT

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
A		ADDED MISSING Ø1.750 DIMENSION -3.	4/26/2011	RJC	
B		-3 DIMENSION WAS Ø1.50 IS Ø1.500-1.501.	6/6/2014	DJN	RJC
3	16-0021	-3 ADDED DIMS Ø1.5, .20.	2/5/2016	DPD	JAG

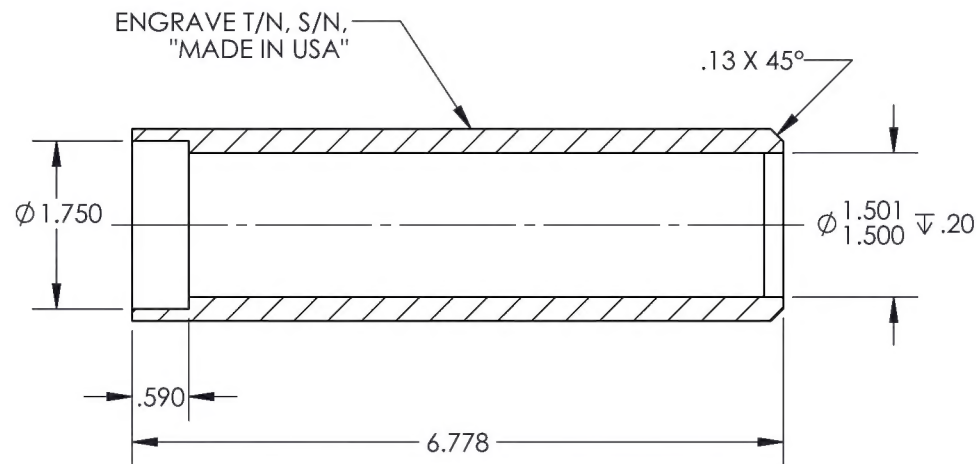

SECTION A-A

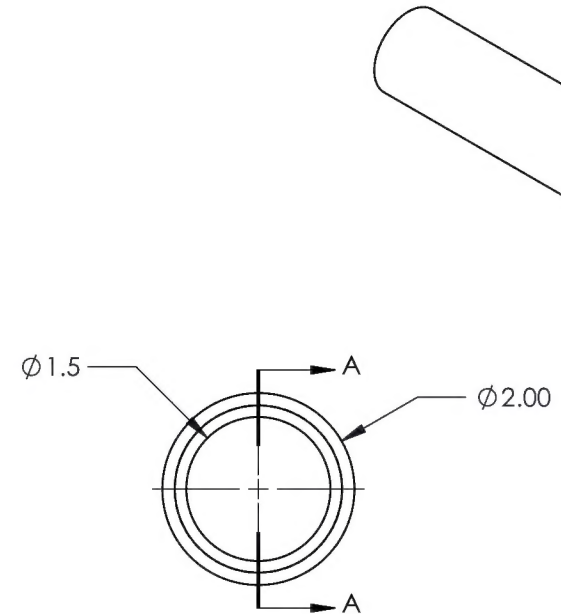



(-3)

TUBE

DART AEROSPACE	
TITLE REACTION ASSY.	
DWG NO. RBW6405G06131-3G-3	REV 3
MAT'L 6061	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125°
DRAWN BY: CLOUGH	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	AGUSTA AW139
SCALE 1:2	DATE 3/19/2010
	SHEET 3 OF 5

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
B		-5 DIMENSION WAS Ø1.50 IS Ø1.4996-1.4992.	6/6/2014	DJN	RJC
3	16-0021	-5 CH'D DIMS WAS Ø.9390-.9400 IS Ø.92. WAS Ø1.4992-1.4996 IS Ø1.497-1.498. CH'D NOTE WAS BORE TO Ø.9400 AFTER WELDING IS BORE TO FINAL DIM AFTER WELDING, SEE -1.	2/5/2016	DPD	JAG

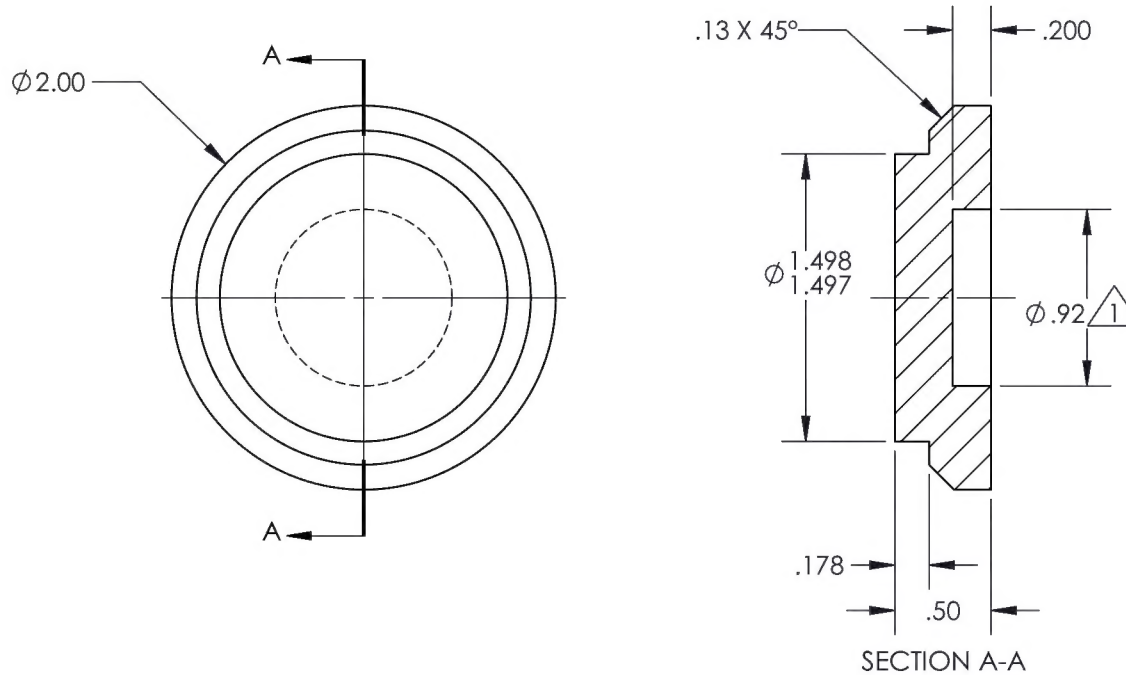

NOTE:




1 BORE TO FINAL DIM AFTER WELDING, SEE -1.

DART AEROSPACE	
TITLE REACTION ASSY.	
DWG NO. RBW6405G06131-3G-5	REV 3
MAT'L 6061	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125
DRAWN BY: CLOUGH	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
SCALE 1:1	DATE 3/19/2010
	SHEET 4 OF 5

(-5)
CAP

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
3	16-0021	-7 CH'D DIM WAS .400 IS (.390).	2/5/2016	DPD	JAG

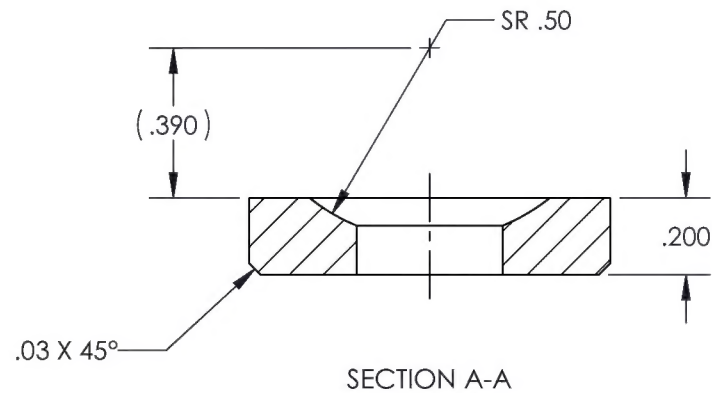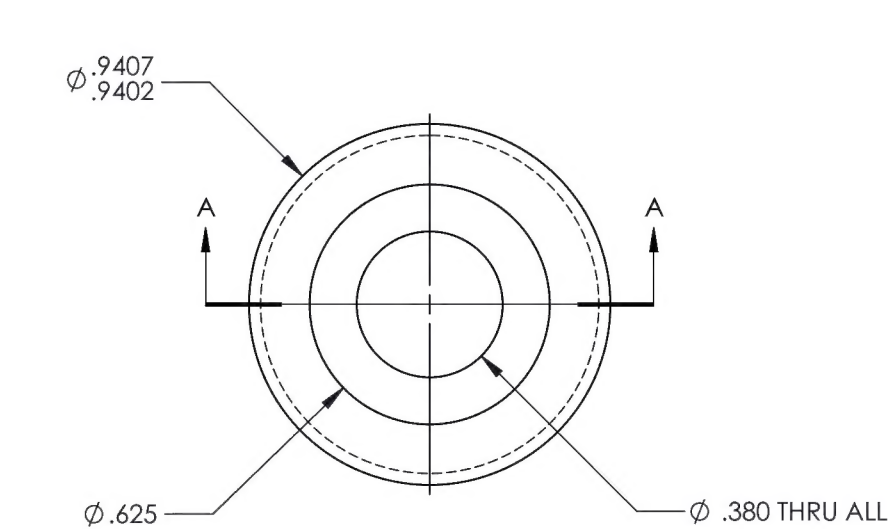

(-7)

WASHER

DART AEROSPACE	
TITLE REACTION ASSY.	
DWG NO. RBW6405G06131-3G-7	REV 3
MAT'L O-1	UNLESS OTHERWISE SPECIFIED
HEAT TREAT RC 50-55	DIMENSIONS ARE IN INCHES
FINISH BLACK OXIDE	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125°
DRAWN BY: CLOUGH	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
SCALE 2:1	DATE 3/19/2010
	SHEET 5 OF 5